



Monofacial

Bifacial

LP210*210-M-66-NH N-Type TOPCon

Rated Power 680-700W




N N-Type MBB Cell
New circuit design N-type cells, can increase the output power of 10W~20W


LOW LIGHT Low Light Features
Higher performance under low light environment.

CONVERSION Higher Output Power
Module adopts 132 pcs of 210*210mm half cells, the maximum power can reach 700W.

2400 Pa 5400 Pa Load Capacity
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

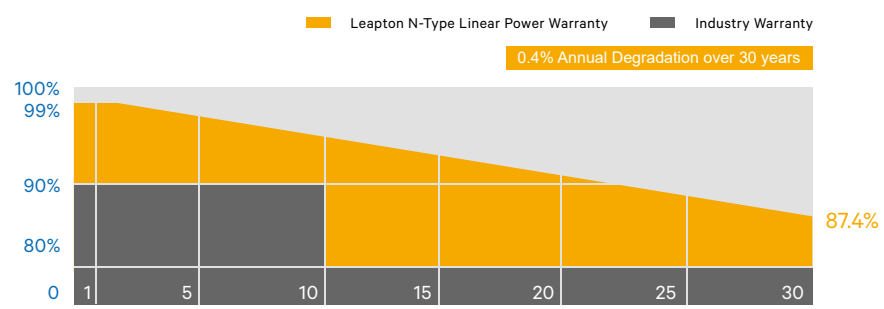

MECHANICAL DIAGRAMS

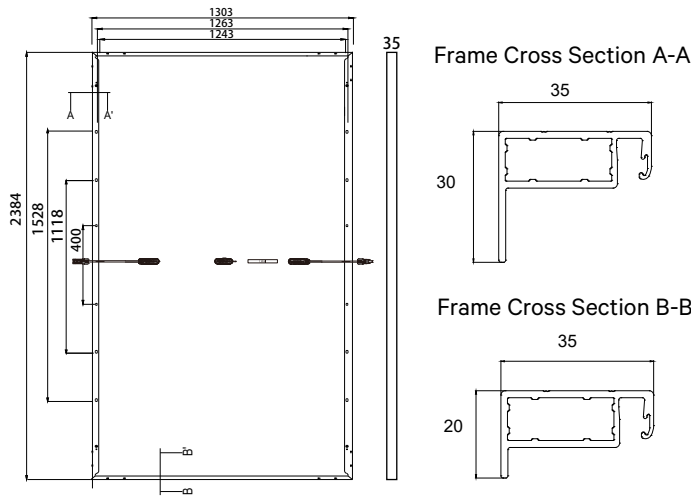

SPECIFICATIONS

Weight	34kg
Dimensions	2384mm*1303mm*35mm
Cell Dimensions	210*210mm
Cell Amount	66*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Front glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Aluminum Alloy
Cable	4mm ² , N 1500mm/P 1500mm for Horizontal installation 4mm ² , N 320mm/P 320mm for Vertical installation
Connector	MC4 compatible

ELECTRICAL PARAMETERS AT STC

Power	680W	685W	690W	695W	700W
Open Circuit Voltage	47.40V	47.60V	47.80V	48.00V	48.20V
Short Circuit Current	18.18A	18.25A	18.30A	18.40A	18.48A
Maximum Power Voltage	39.40V	39.60V	39.80V	40.00V	40.20V
Maximum Power Current	17.26A	17.30A	17.34A	17.38A	17.41A
Module Efficiency	21.89%	22.05%	22.21%	22.37%	22.53%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	518W	522W	526W	530W	534W
Open Circuit Voltage	44.95V	45.15V	45.35V	45.55V	45.75V
Short Circuit Current	14.62A	14.67A	14.70A	14.78A	14.82A
Maximum Power Voltage	37.20V	37.40V	37.60V	37.80V	38.00V
Maximum Power Current	13.92A	13.96A	13.99A	14.02A	14.05A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS


NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

PACKING CONFIGURATION


Modules/Pallet	32 Pieces	Modules/40'Container	576 Pieces
Packing Description	18 Pallets, Total=32x18=576 Pieces		

CHARACTERISTICS

LP210*210-M-66-NH-700W



LP210*210-M-66-NH-700W

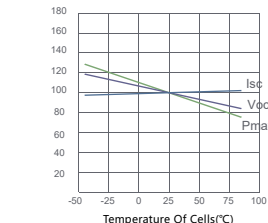

MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	30A

25 YEARS Quality Warranty

30 YEARS Power Warranty

Headquarter : Lepton Energy Co., Ltd.

📍 Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Lepton Solar (Changshu) Co., Ltd.

📍 No.9, Sunshine Avenue, Changshu City, Jiangsu, China

☎ +86-512-88800068

✉ info@leptonenergy.com

🌐 www.leptonpv.com

☎ +81-78-382-3182

🌐 www.leptonenergy.jp

